

NC3-Series Concrete

SPECIFICATIONS


Treatment Capacity ____ 500 to 600 G.P.D.

BOD Loading _____ 1.25 to 1.5 lbs.

Aerator _____ 2.8 scfm

Control Panel _____ Raintight

Electrical _____ 115V/60Hz

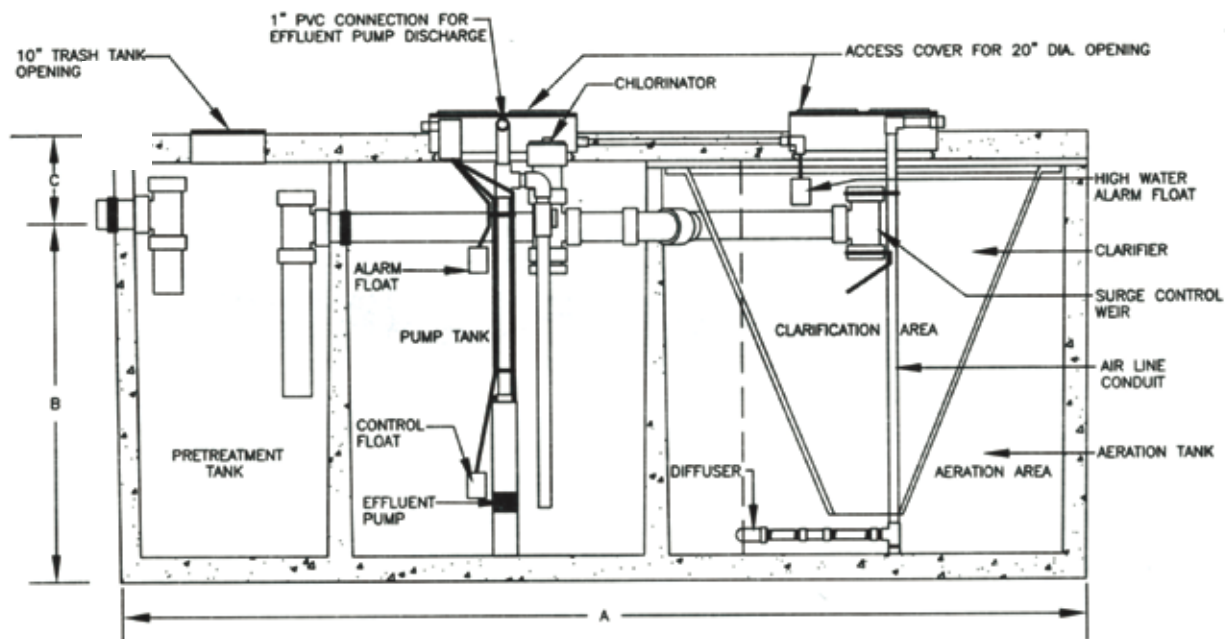



DIMENSIONS

MODEL	A	B	C	D
500 NC3	12' 2"	60"	12"	75"
600 NC3	12' 7"	60"	12"	82"

U.S. Patent Numbers

5,221,470 • 5,770,081 • 5,785,854 • US 8,038,874 B2 •
 US 6,358,411 B1 • US 7,513,994 B2 • US 7,178,677 B1
 Other Patents Pending

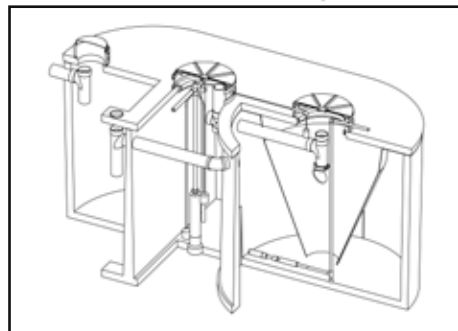



CLEARSTREAM®
WASTEWATER SYSTEMS, INC.

MODELS NC3-Series

SPECIFICATIONS

MODEL	TREATMENT CAPACITY	BOD LOADING	AERATOR	CONTROL PANEL
500NC3-500	500 GPD	1.25 lbs	2.8 scfm	Raintight
500NC3-750	500 GPD	1.25 lbs	2.8 scfm	Raintight
600NC3	600 GPD	1.5 lbs.	2.8 scfm	Raintight

Other systems available from 500 to 1,500 GPD and NSF/ANSI Standard 40, 245, 350



CLASS I
NSF/
ANSI 40



Clearstream Systems are one of the finest aerobic wastewater systems available in the industry today. The high degree of treatment is accomplished at a remarkably low operating cost per month. Clearstream Wastewater Systems are in full compliance with NSF/ANSI Standard 40.

Clearstream Systems provides a two-year warranty on its equipment, without hidden conditions. We are confident of the durability and quality of our systems, so our warranty is simple. If the equipment is defective, we will either replace it with new components or repair the existing component at no charge.

Aerators, control panels, and accessory equipment from Clearstream Systems are manufactured according to the strictest guidelines. We have a long history of providing our customers with the most reliable components created with top quality materials while still being offered at a reasonable price.

Corporate Office (409) 755-1500 • Toll Free (800) 586-3656 • Fax (409) 755-6500
4899 U.S. Hwy 69S • Lumberton, Texas 77657 • www.clearstreamsystems.com