



NU-Series Fiberglass

SPECIFICATIONS

Treatment Capacity _____ 500 to 600 G.P.D.

BOD Loading _____ 1.25 to 1.5 lbs.

Aerator _____ 2.4 to 2.8 scfm

Control Panel _____ Raintight


(Model CS-114A, AP, AT, AN;

Model CS-114B, BT, BP, BN)

Electrical _____ 115/60Hz/.75 amps/82 watts



(See specifications for NU-Series on next page)

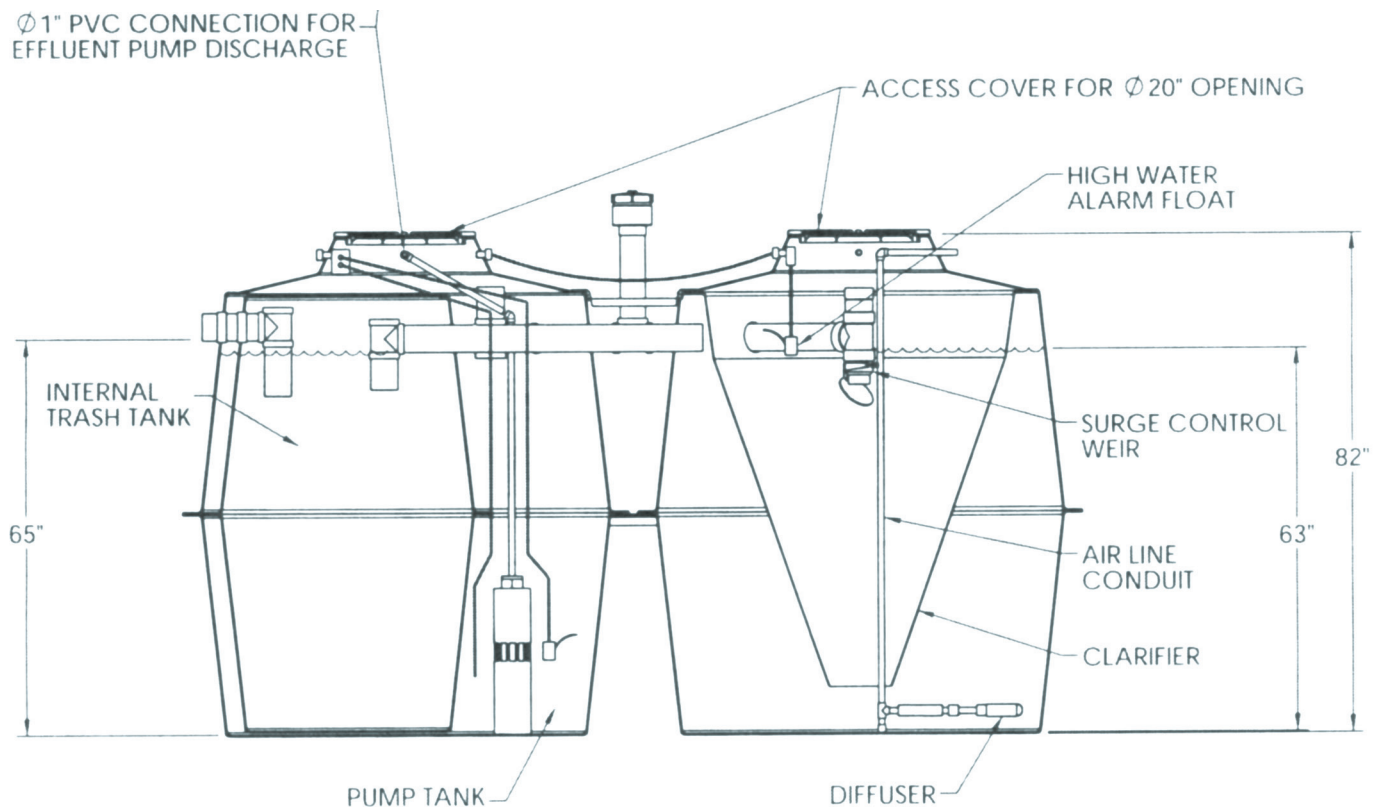

(490) 755-1500 • Toll Free (800) 586-3656 • Fax (409) 755-6500
www.clearstreamsystems.com



MODELS NU-Series

SPECIFICATIONS

MODEL	SKU	MATERIAL	TREATMENT CAPACITY	BOD LOADING	AERATOR	ELECTRICAL
500NU	500NU	Fiberglass	500 GPD	1.25 lbs	2.4 scfm	115v/60Hz/.75 amps/82 watts
600NU	600NU	Fiberglass	600 GPD	1.5 lbs.	2.8 scfm	115v/60Hz/.75 amps/82 watts

All control panels are Raintight brand.



The Clearstream System is one of the finest aerobic wastewater systems available in the industry today. The high degree of treatment is accomplished at a remarkably low operating cost per month. The Clearstream Wastewater System 500N (Fiberglass casing) and 500NC (concrete casing) are in full compliance with NSF standards 40 for Class 1 systems.



Clearstream Systems provides a two-year warranty from date of purchase on its equipment, without hidden conditions. We are confident of the durability and quality of our systems, so our warranty is simple. If equipment installed by a Clearstream installer is defective, we will either replace it with a new system or repair the existing system at no charge. No explanations required.



Aerators, control panels, and accessory equipment from Clearstream Wastewater Systems are manufactured according to the strictest guidelines. We have a long history of providing our customers with the most reliable components created with top quality materials while still being offered at a reasonable price.

(490) 755-1500 • Toll Free (800) 586-3656 • Fax (409) 755-6500
www.clearstreamsystems.com